






PRIMUS, naturally oiled

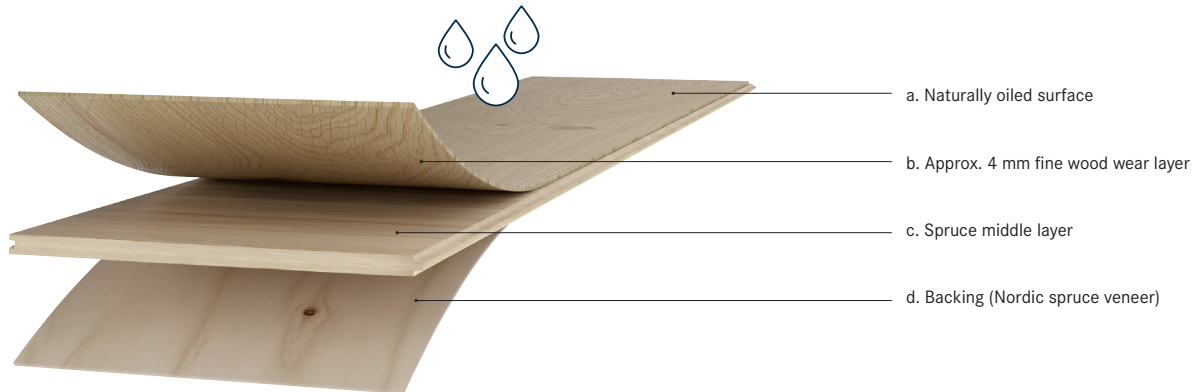

Tests	DIN / EN standard	HAIN Parquet flooring PRIMUS, naturally oiled
General data on product composition		
Type of covering:		Flooring panel with top layer made from fine wood
Total thickness:		approx. 15 mm
Effective measurement: (length × width)		2 200 × 160 mm (each parquet plank can be included in the package as two half-planks)
Product structure:		a. Naturally oiled surface b. Approx. 4 mm fine wood wear layer c. Spruce middle layer d. Backing (Nordic spruce veneer)
Technical data		
 Cfl-s1 Brandschutz EN 13501 A1-s0, B1-s1	Fire behaviour:	EN 14342:2013
		D _{fl} -s1 (normally flammable) with floating installation (15 mm) in connection with the minimum value of the average density $\geq 500 \text{ kg/m}^3$ and the minimum overall thickness of 15 mm
		EN 13501
 E1 HCHO	Formaldehyde emissions (E1 = 0.1 ppm):	EN 717-1
		E1
 DL PCP	Content of pentachlorophenol:	CEN/TR 14823
		$\leq 5 \times 10^{-6n}$
	Underfloor heating:	Please follow the separate briefing sheets for installation on hot-water underfloor heating and over electrical underfloor heating systems
	Underfloor cooling:	A separate leaflet is available for laying on cooled floor constructions
	Heat transfer resistance:	EN 12664
		0.15 m ² K/W
	Thermal conductivity:	EN 12664
		0.106 W/mK
	Antislip inclined plane:	DIN 51130
		R10 (oak with brushed surface)
		BGR 181
General data on environment, installation and care		
	Blue Angel:	RAL-UZ 176
		awared (except for smoked surfaces)
	Disposal:	Residual pieces can be disposed of in household refuse (e.g. thermal treatment). Dispose large quantities according to municipal provisions (e.g. recycling centres). An energetic utilisation in authorised plants is recommended.
	Cleaning and care:	Cleaning after construction work / maintenance cleaning: HAIN Special soap Basic cleaning: HAIN Basic cleaner Care: HAIN Care balm