






VIALE, naturally oiled

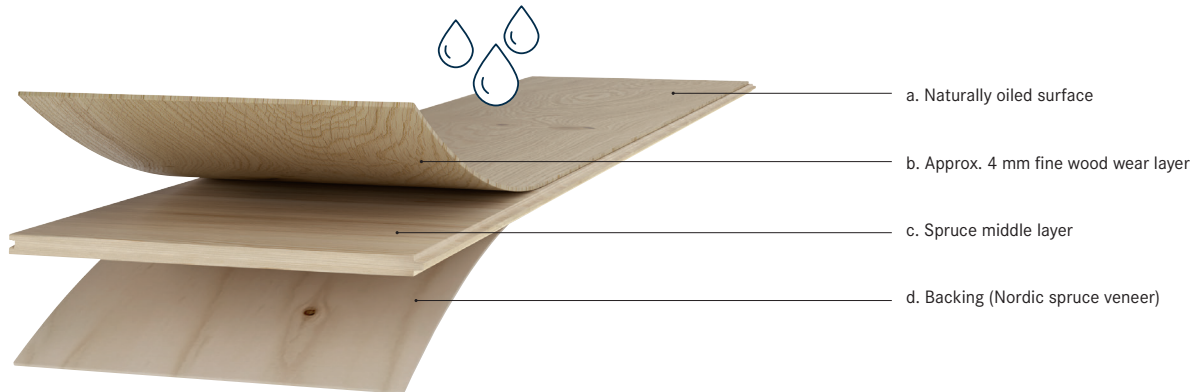

Tests	DIN / EN standard	HAIN Parquet flooring VIALE, naturally oiled
General data on product composition		
Type of covering:		Flooring panel with top layer made from fine wood
Total thickness:		approx. 15 mm
Effective measurement: (length × width)		2 200 × 245 mm
Product structure:		a. Naturally oiled surface b. Approx. 4 mm fine wood wear layer c. Spruce middle layer d. Backing (Nordic spruce veneer)
Technical data		
 Cfl-s1 Brandchutz EN 13501-1	Fire behaviour:	EN 14342:2013 D _{fl} -s1 (normally flammable) with floating installation (15 mm) in connection with the minimum value of the average density ≥ 500 kg/m ³ and the minimum overall thickness of 15 mm
 E1 HCHO	Formaldehyde emissions (E1 = 0.1 ppm):	EN 13501 C _{fl} -s1 (hardly flammable) with full-surface bonding using the glue HAIN Elastic
 DL PCP	Content of pentachlorophenol:	CEN/TR 14823 ≤ 5 × 10 ⁻⁶ⁿ
	Underfloor heating:	Please follow the separate briefing sheets for installation on hot-water underfloor heating and over electrical underfloor heating systems
	Underfloor cooling:	A separate leaflet is available for laying on cooled floor constructions
	Heat transfer resistance:	EN 12664 0.15 m ² K/W
	Thermal conductivity:	EN 12664 0.106 W/mK
	Antislip inclined plane:	DIN 51130 BGR 181 R10 (oak with brushed surface)
General data on environment, installation and care		
Blue Angel:	RAL-UZ 176	awared (except for smoked surfaces)
Disposal:		Residual pieces can be disposed of in household refuse (e.g. thermal treatment). Dispose large quantities according to municipal provisions (e.g. recycling centres). An energetic utilisation in authorised plants is recommended.
Cleaning and care:		Cleaning after construction work / maintenance cleaning: HAIN Special soap Basic cleaning: HAIN Basic cleaner Care: HAIN Care balm